

ULTRA WIDEBAND ANTENNA WITH BAND NOTCH AT 5.8 GIGAHERTZ USING
CONDUCTIVE SILVER COATED THIN FILM

MOHD SUBRI BIN ABDUL RANI

UNIVERSITI TEKNOLOGI MALAYSIA

ULTRA WIDEBAND ANTENNA WITH BAND NOTCH AT 5.8 GIGAHERTZ
USING CONDUCTIVE SILVER COATED THIN FILM

MOHD SUBRI BIN ABDUL RANI

A thesis submitted in fulfilment of the
requirements for the award of the degree of Master
of Engineering (Electrical)

Faculty of Electrical Engineering
Universiti Teknologi Malaysia

JUNE 2014

This thesis is dedicated to:

My beloved mother, RUBIAH BINTI IDRIS, my father, ABDUL RANI BIN ALI and
all my siblings for their endless supports, loves and cares.

ACKNOWLEDGEMENT

Alhamdulillah, Praise to Allah S.W.T for His blessing and guidance that has inspired me through this project which was able to be completed within the required time and gain enormous knowledge that is useful for the future undertaking.

I would like to offer my heartfelt gratitude to my supervisor, Associate Professor Ir. Dr. Sharul Kamal bin Abdul Rahim for his support, guidance, advice and willingness to help me in completing my master project. Also, my deepest appreciations to him for his patience in enduring my stubbornness during my rebellious phase.

I would like to dedicate my special appreciations to my family, especially to my dad, Mr. Abdul Rani bin Ali and Mrs. Rubiah binti Idris who have supported me to endure the hardships throughout my whole university life. Without them, i would have given up midway of this journey. Thank you.

I would also like to thank all the WCC members and colleagues for their valuable support and discussion during my master. I will appreciate the knowledge shared and use it for my lifelong journey onwards.

I also want to dedicate my appreciation to my friends for all the help and assistance during my project especially to Mr. Mursyidul Idzam, Mr Muhammad Zairil Muhammad Nor, Mr Arsany Arsad, Mr. Raimi Dewan, Mr. Bashir, Ms Fadalia Dina, Ms. Alyaa Syaza, Mr. Hasbullah Mazlan, Mr. Ezwan, Mr. Sazali Hisham and Mr Syazwan Sehat.

Alhamdulillah, I have managed to complete the project and gained valuable knowledge and experience during that time. May Allah S.W.T repay all their kindness and bless all of us. AMIN

ABSTRACT

Wireless communication technology is a fast developing technology which gives a huge impact on social life nowadays. Currently, thin film is one of the emerging technologies in the recent antenna technology and it has been rapidly adapted into the wireless communication system over these few years. It has attracted major attention to antenna designers due to its major advantage which is very low thickness. This thesis focuses on the design of the Ultra Wideband (UWB) antenna with a band notch at 5.8 GHz using the conventional FR-4 and the thin film as the main materials. The UWB antenna is capable of covering the 3.1-10.6 GHz frequencies, which includes the *IEEE 802.11.a* WLAN frequency of 5.8 GHz. A Split Ring Resonator/Complimentary Split Ring Resonator (SRR/CSRR) was introduced in the design to achieve band notch at 5.8 GHz and reduce interferences from WLAN applications. The effects of the SRR/CSRR on these UWB antennas are thoroughly analyzed in terms of their placements. The SRR/CSRR can be placed at both outside and inside of the radiating element when FR-4 is used. However, placing the SRR outside the radiating element of the transparent antenna produced a poor notch of only -9.61 dB reading on its reflection coefficient. Meanwhile, implementation of SRR inside the radiating element gave better reflection coefficient of -7.80 dB. The surface losses of AgHT-8 limit the possible position to place the SRR on the transparent antenna. Besides, it also significantly reduces transparent antenna's gain to -6 dBi. The proposed antenna is a new type of antenna that can be integrated with window glass and used for indoor monitoring system.

ABSTRAK

Teknologi komunikasi wayarles adalah satu teknologi yang pesat membangun yang memberi kesan yang besar terhadap kehidupan sosial pada masa kini. Teknologi filem nipis adalah salah satu teknologi baru dalam teknologi antenna dan ia telah diadaptasi dengan cepat ke dalam sistem komunikasi tanpa wayar sejak beberapa tahun ini. Teknologi ini menarik perhatian pereka antenna kerana kelebihan utamanya iaitu bahan-bahannya yang sangat nipis. Tesis ini memberi tumpuan kepada reka bentuk antenna Jalur Lebar Luas (UWB) dengan frekuensi tolakan pada 5.8 GHz menggunakan bahan sedia ada FR-4 dan filem nipis sebagai bahan-bahan utama. Antenna UWB ini mampu meliputi frekuensi UWB dari 3.1 GHz hingga 10.6 GHz yang merangkumi frekuensi IEEE 802.11.a WLAN pada 5.8 GHz. Satu Resonator Cincin Terpisah/Resonator Cincin Terpisah Slot (SRR/CSRR) telah digunakan untuk menghasilkan frekuensi tolakan pada 5.8 GHz dan mengurangkan interferens dari aplikasi-aplikasi WLAN. Kesan pengenalan SRR/CSRR pada antenna UWB ini dikaji secara menyeluruh terutama daripada segi kedudukannya. SRR/CSRR boleh diletakkan di kedua-dua bahagian luar atau dalam unsur pemancar apabila FR-4 digunakan. Walau bagaimanapun, bacaan pekali pantulan adalah lemah (-9.61 dB) jika SRR/CSRR diletakkan di luar unsur pemancar antenna filem nipis. Bacaan pekali pantulan akan bertambah baik (-7.8 dB) jika SRR/CSRR ini diletakkan di dalam unsur pemancar bagi antenna filem nipis. Kedudukan SRR di dalam antenna filem nipis adalah terhad kerana filem nipis ini mempunyai kehilangan permukaan yang tinggi. Selain itu, kehilangan permukaan itu juga menghadkan nilai capaian antenna ini dengan nilai maksimum hanya sebanyak -6 dBi. Antenna yang dicadangkan ini merupakan antenna jenis baru yang boleh digabungkan dengan cermin tingkap dan digunakan untuk sistem pengawasan dalam bangunan.

TABLES OF CONTENTS

CHAPTER	TITLE	PAGE
	DECLARATIONS	ii
	DEDICATIONS	iii
	ACKNOWLEDGEMENTS	iv
	ABSTRACT	v
	ABSTRAK	vi
	TABLE OF CONTENTS	vii
	LIST OF TABLES	x
	LIST OF FIGURES	xi
	LIST OF ABBREVIATIONS	xv
	LIST OF SYMBOLS	xvi
	LIST OF APPENDICES	xviii
1	INTRODUCTION	
	1.1. Research Background	1

1.2. Problem Statement	3
1.3. Objectives of Research	4
1.4. Scope of Work	5
1.5. Thesis Layout	6

2 LITERATURE REVIEW AND RESEARCH MOTIVATION

2.1. Introduction	8
2.2. Planar Monopole Antenna Structure	9
2.2.1. Material for Planar Monopole Antenna	11
2.2.2. Feeding Methods	11
2.3. Thin Film Technology	11
2.3.1. Applications of Thin Film in Industries	13
2.3.2. Conductive Silver Coated Thin Film	14
2.3.3. Theoretical Limitation of AgHT-8 in Antenna Design	14
2.4. Band Notch Elements	16
2.5. Motivation from Previous Research	16
2.5.1. UWB Planar Monopole Antenna	17
2.5.2. UWB Planar Monopole Antenna with Band Notch	17
2.5.3. UWB Transparent Thin Film Antenna	20
2.6. Summary	21
	26

		31
		35
3	RESEARCH METHODOLOGY	
	3.1. Introduction	37
	3.2. Design Methodology	37
	3.3. Design Specification	
	3.4. Simulation Tool	40
	3.5. Fabrication Process	40
	3.6. Measurement Process	
	3.7. Summary	43
		44
		48
4	UWB TRANSPARENT ANTENNA WITH BAND NOTCH USING COMPLEMENTARY SPLIT RING RESONATORS	
	4.1 Development of UWB Planar Monopole Antenna with Band Notch Using Split Ring Resonators	49
	4.1.1. Introduction	49
	4.1.2. The Development of UWB Microstrip Antenna with Band Notch	50
	4.1.3. Proposed UWB Microstrip Antenna with Band Notch Structure	51

4.1.4. Analyses and Discussions on UWB Planar Monopole Antenna with SRR	57
4.2. Development of UWB Transparent Antenna with Band Notch Using Split Ring Resonators and Complementary Split Ring Resonators	68
4.2.1 Introduction	
4.2.2 Proposed UWB Transparent Antenna with Band Notch Structure	68
4.2.3 Analyses and Discussions on CPW-fed UWB Transparent Antenna with SRR/CSRR	69
4.3. Integration of UWB Transparent Antenna with Glass	74
4.4 Summary	89
	94
5 CONCLUSION AND FUTURE WORKS	
5.1 Contributions of Thesis	96
5.2 Conclusions	98
5.3 Future Works and Recommendations	99
REFERENCES	101
Appendices A-B	108

LIST OF TABLES

TABLE NO.	TITLE	PAGE
2.1	Properties of AgHT-4 and AgHT-8	16
2.2	Summarized related works on UWB antenna designs	24
2.3	Summarized related works on UWB antennas with SRR/CSRR as band notch	30
2.4	Summarized related works on transparent UWB antenna designs	35
4.1	Dimensions of Proposed Split Ring Resonator	55
4.2	Overall Performances of the Proposed Antenna	64
4.3	Proposed Microstrip Antenna Parameter	67
4.4	Dimensions of Proposed Transparent Split Ring Resonator	68
4.5	Dimensions of proposed Antenna 2 and Antenna 3	70
4.6	Overall Performances of Antenna 1,2 and 3	86

LIST OF FIGURES

FIGURE NO.	TITLE	PAGE
1.1	BLUENION indoor position tracking	4
1.2	Original CST Software	6
2.1	Microstrip Antenna Structure	11
2.2	Typical Feeding Methods for Microstrip Antenna	12
2.3	Standard AgHT-4 properties	15
2.4	Antenna with different slot configurations	18
2.5	Series LC connected in shunt with load for band stop filter	19
2.6	Parallel LC connected in series with load for band stop filter	19
2.7	Equivalent Split Ring Resonator (SRR) to a LC resonator	20
2.8	Elliptical open ended microstrip fed UWB antenna	21
2.9	Circular ring with modified ground UWB	22

	antenna	
2.10	CPW-fed pentagonal-shaped UWB antenna	22
2.11	Circular CPW-fed UWB antenna	23
2.12	Geometries of UWB antennas (a) rectangular (b) triangle (c) square (d) circle (e) annular ring (f) ellipse (vertical) (g) ellipse (h) pentagon (i) hexagon	24
2.13	Dual-notched UWB antenna using CSRR	27
2.14	Proposed position of CSRR in UWB antenna	28
2.15	4 different locations of CSRR setup	29
2.16	SRR setup outside the radiating element	29
2.17	Transparent UWB antenna	32
2.18	Transparent UWB antenna with tunable notch	33
2.19	New soldering method using conductive silver epoxy	34
2.20	Meshed silver/titanium bi-layer grid	34
3.1	Flow Chart of Whole Project	39
3.2	CST Simulation Tool	41
3.3	(a) Parameters setup for AgHT	41
	(b) Parameters setup for PET	42
3.4	AutoCAD software layout	43
3.5	Cameo Silhouette Cutting tool	43

3.6	Cameo Silhouette software layout	44
3.7	R&S ZVL network analyzer	44
3.8	Setup layout for radiation pattern measurement	45
3.9	Anechoic chamber at Universiti Teknologi Malaysia	46
3.10	Anechoic chamber at Universiti Malaysia Perlis	46
3.11	Anechoic chamber at The Hong Kong University	47
4.1	(a) Front view of radiating elements	52
	(b) Rear view of ground structure	53
4.2	Geometries of Split Ring Resonator (SRR)	54
4.3	Proposed location of the SRR	56
4.4	S11 of proposed UWB microstrip antenna with different radius of circular radiating element, R	57
4.5	S11 Results of	
	(a) varying ring outer radius, R_2	59
	(b) varying distance between rings, D	
4.6	S11 of UWB microstrip antenna after integration with SRR at several proposed locations	60
4.7	Surface current distribution at 5.8 GHz (a) without SRR (b) with SRR	61
4.8	Proposed parabolic ground UWB microstrip antenna with SRR	62

4.9	Fabricated antenna	62
4.10	Simulated and measured S11 of proposed antenna design	63
4.11	Simulated 3D radiation pattern at (a) 3.5 GHz (b) 5.2 GHz (c) 5.8 GHz (d) 8.5 GHz	64
4.12	Comparison of simulated and measured normalized radiation patterns (H-Plane) at (a) 3.5 GHz (b) 5.2 GHz	66 67
4.13	(a) S11 of transparent antenna using the design in previous section (b) Proposed CPW-fed transparent antenna structure	70 70
4.14	Implementation of two SRRs outside the radiating element	72
4.15	Implementation of CSRR inside the radiating element.	73
4.16	S11 of different radiating element radius, R	74
4.17	S11 of different SRRs distance in y-axis, d_1 in Antenna 2	75
4.18	S11 of different SRRs distance in x-axis, d_2 in Antenna 2	76
4.19	S11 of different CSRR distance, d_3 in Antenna 3	77

4.20	Surface current distribution at 5.8 GHz for	
	(a) Antenna 1 (b) Antenna 2	78
	(c) Antenna 3	
4.21	Simulated S11 of Antenna 1,2 and 3	79
4.22	Simulated radiation pattern	
	(a) E-plane at 4 GHz (b) H-plane at 4 GHz	80
	(c) E-plane at 7 GHz (d) H-plane at 7 GHz	
	(e) E-plane at 10 GHz (f) H-plane at 10 GHz	
4.23	Prototype of (a) Antenna 1 (b) Antenna 2	82
	(c) Antenna 3	
4.24	Comparison of S11 between Antenna 1 and 2	83
4.25	Comparison of S11 between Antenna 1 and 3	84
4.26	Measured radiation pattern	
	(a) E-plane at 4 GHz (b) H-plane at 4 GHz	85
	(c) E-plane at 7 GHz (d) H-plane at 7 GHz	
	(e) E-plane at 10 GHz (f) H-plane at 10 GHz	86
4.27	Measured gain of Antenna 1, 2 and 3	87
4.28	Setup for proposed parametric studies	90
4.29	S11 of proposed integrated antenna with different glass permittivity, ϵ_g	91
4.30	S11 of proposed integrated antenna with	92

	different glass width, W_{gl}	
4.31	S11 of proposed integrated antenna with different glass width, L_{gl}	93
4.32	S11 of proposed integrated antenna with different glass thickness, t_{gl}	94

LIST OF ABBREVIATIONS

UWB	-	Ultra Wideband
CPW	-	Co-planar Waveguide
CST	-	Computer Simulation Technology
OLED	-	Organic Light Emitting Diode
FR-4	-	Flame Resistant 4
AgHT	-	Conductive Silver Coated Thin Film
PET	-	Polyethylene Terephthalate
RFID	-	Radio Frequency Identification
SRR	-	Split Ring Resonator
CSRR	-	Complementary Split Ring Resonator
FCC	-	Federal Communication Commission
PEC	-	Perfect Electric Conductor
EMI	-	Electromagnetic Interference
RFI	-	Radio Frequency Interference
WLAN	-	Wireless Local Area Network
WiMAX	-	Worldwide Interoperability for Microwave Access
dB	-	Decibel
dB _i	-	Isotropic Decibel
S ₁₁	-	Reflection Coefficient

LIST OF SYMBOLS

σ	-	Surface resistivity
ρ	-	Conductivity
ϵ_r	-	Dielectric permittivity
ϵ_{reff}	-	Dielectric effective permittivity
f	-	Resonating frequency
f_L	-	Low resonating frequency
L	-	Inductance
C	-	Capacitance
R	-	Resistance
H	-	Height of cylindrical monopole antenna
r	-	Radius of cylindrical monopole antenna
p	-	Probe length
R	-	Radius of circular planar monopole antenna
R_{eff}	-	Effective radius of circular planar monopole antenna
c	-	Velocity of light in free space
k_{nm}	-	m th zero derivative of Bessel function based on n th order
W_s	-	Width of substrate
L_s	-	Length of substrate
W_f	-	Width of transmission line
L_{TL}	-	Length of transmission line
w_r	-	width of ring resonator
$R1$	-	Outer radius of split ring resonator
$R2$	-	Inner radius of split ring resonator

D	-	Separation distance between rings of resonator
gr	-	Gap of ring resonator
Wg	-	Width of CPW ground
Lg	-	Length of CPW ground
g	-	Gap of CPW
Wtl	-	Width of CPW transmission line
$d1$	-	Distance of SRR in y -axis
$d2$	-	Distance of SRR in x -axis
$d3$	-	Distance of SRR from the center of radiating element
$r3$	-	Radius of circular slot in Antenna 3
Ω	-	Ohm

LIST OF APPENDICES

APPENDIX	TITLE	PAGE
A	List of Author's Publication	108
B	AgHT Product Specification	111

CHAPTER 1

INTRODUCTION

1.0 Research Background

Planar monopole antenna is one of the antennas that have been widely used in the recent antenna technologies. This type of antenna has been rapidly developed over the past few decades and have become very popular among the researchers because of its properties such as its compact size, low profile, light weight, low cost and easiness in the fabrication process [1]. Planar monopole antenna can be described as a microstrip antenna with very thick air substrate and the ground is located at infinity [2]. The microstrip antennas have some major disadvantages such as low efficiency, low power, narrow bandwidth and poor polarization [3]. Many researches were conducted to further improved the disadvantages of these microstrip antennas and the outcome of these researches have produced various types of planar monopole antenna structure and shapes [4-8]. Further optimizations were also made on the shape of the ground plane of these planar monopole antennas [9-12]. These optimizations were targeted to overcome the previously mentioned disadvantages of the microstrip antennas. There have been too many researches conducted on the variation of the structures and shapes of the antenna making the field to become saturated. Thus, the current researchers are now looking into another angle of research; the possibility of implementing new materials in the antenna design.

Currently, thin film is one of the emerging technologies in the recent antenna technology and it has been rapidly adapted into the wireless communication system over these few years. It has attracted major attention to antenna designers due to its major advantage; very low thickness. Thin film technology has been implemented widely in product areas, such as in x-ray detectors, thin film photovoltaic and as well as smaller but possibly growing areas of OLED displays or e-book readers [13]. One of the popular thin film materials is the transparent conductive silver coating material (AgHT-8), which is almost transparent to the human eye with minimum of 82% visible transparency percentage. AgHT-8 consists of two layers; first layer is the substrate which is made of Polyethylene Terephthalate (PET) and the second layer is the conductive layer that consists of conductive silver coating.

Since the AgHT-8 structure is a single sided, where it consists of only a substrate and a conductive layer, the co-planar waveguide (CPW) feeding needs to be implemented. CPW feeding is a type of feeding where the ground and transmission line are both on the same surface. A lot of CPW-fed antennas have been designed over the few years and these show that these antennas can be used in both Ultra Wide Band (UWB) and single band frequency. These kinds of antennas has attracted a lot of attentions due to their advantages of low radiation losses, less dispersion and wider bandwidth compared to other type of microstrip feedings [14].

As for this research concerns, the CPW-fed antenna was used as it is easier to cover the 3.1 - 10.6 GHz, UWB band. It is desirable so that the antenna is transparent and less bulky compared to existing antennas. Since the transparent material used is new in this field, some properties and performances of the antenna designed using the material still need to be determined. Apart from the level of material transparency, the performances of the transparent antenna in terms of return loss, efficiency, gain and radiation pattern were verified and compared to the non-transparent antenna.

Lastly, the antenna made of the AgHT-8 improved the ease of antenna implementation in public areas. The transparent antenna should be able to be integrated to existing commercial window glass. These facts have motivated this research to design

a simple transparent antenna operating at UWB frequencies, which can be integrated to the commercial window glass.

1.1 Problem Statement

The transparent antenna is a new antenna innovation that is very useful in the recent wireless communication. Recent development in antenna technology requires the development of an antenna that can be implemented in public areas without being apparent to the naked eyes. The conventional antenna are usually implemented to a system and high likely to be installed at an open space to obtain maximum performances. However, since the antenna is apparent, it is prone to vandalism and sometime, raising concerns to the users regarding the radiation effect of the antenna to the human body. This limitation can be overcome by using this thin film antenna which is more than 82% transparent. The transparent antenna can be installed at any place and provide the coverage needed. This transparent antenna can be integrated to the existing windows of a building or room to reduce the space required.

Recent UWB technologies have introduced a new tracking and monitoring system that operated within frequency range of 3.1 GHz to 10.6 GHz such as the patient monitoring system in a hospital. This monitoring system requires some sensors and antennas to establish a wireless transmission to collect and send data over the networks. The system requires many antennas to cover the whole hospital building areas. The problem of using conventional antenna is that the antenna is apparent and can be spotted by the patient, visitors and the staffs in the building, raising concerns on the radiation effects of the antenna to the users. Figure 1.1 shows an example of indoor position tracking created by a company in Hungary (Bluenion) [15]. They had conducted a case study and implemented an indoor positioning system inside a clinic in Shanghai, China. The system uses Wifi, Bluetooth and RFID technologies for the wireless transmission. However, the concept of the system can be used for UWB tracking system. Some

sensors and wireless routers (with a built-in antenna) are required to cover the whole clinics, which are apparent to the visitors view. By using the proposed thin film transparent antenna, the antenna can be integrated to the windows and can hardly be spotted by common eyes. Thus, the transparent antenna can provide the coverage needed without losing the aesthetic values.

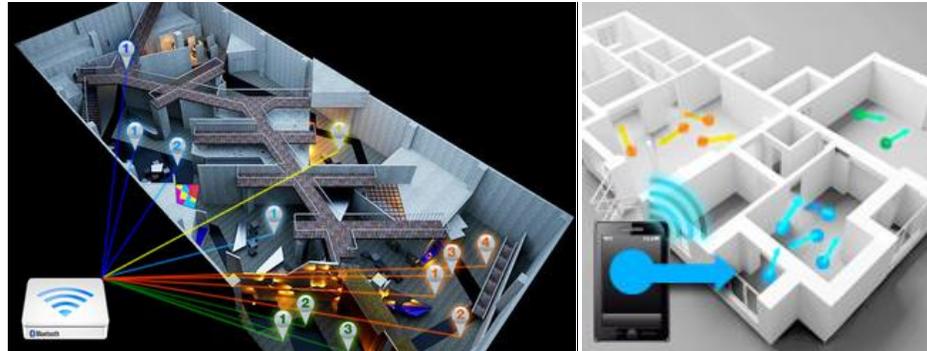


Figure 1.1: BLUENION indoor position tracking [15]

1.2 Objectives of Research

This research gives a positive impact to the development of wireless communication technology. The project introduced a new design of a transparent thin film antenna operating at UWB frequencies. The objectives of this project are:

- i. To design and analyze the performances of SRR/CSRR.
- ii. To design, simulate and fabricate an UWB antenna with band notch at 5.8 GHz using FR-4.
- iii. To analyze the effects of using transparent material (AgHT) in UWB antenna design and SRR/CSRR performances.

1.3 Scope of Work

In order to achieve the objectives, several steps have been considered to accomplish the proposed reconfigurable antenna. This includes a comprehensive literature review, which is required to obtain a basic UWB antenna design. It is important to build basic knowledge on designing the proposed antenna and to identify all the expected result in designing an antenna. In this project, the focuses are on the design of UWB antenna using both non-transparent (FR-4) and transparent (AgHT-8) materials.

The first design is the UWB antenna using the FR-4 board. This antenna should cover the 3.1 - 10.6 GHz frequency range. After an UWB antenna is successfully designed, the effects of adding a metamaterial (SRR/CSRR) to the antenna are to be analyzed. This step involves determining the parameters and best location of the SRR/CSRRs. The second design is the UWB antenna using conductive silver coated thin film (AgHT), which is the transparent material. The same steps as in the first design was used to determine the effects of the metamaterial on the transparent antenna.

Since the purpose of the transparent antenna is to be integrated with commercial glass window, some analyses on the effects of the glass windows on the antennas' performances were carried out. In this project, some common clear substrates of different properties in terms of permittivity were analyzed to represent the various types of windows glass available in the market. The effects of sizes and thickness of the clear substrate were analyzed. In the process of designing the antennas, electromagnetic software such as Computer Simulation Technology (CST) is required to verify the performance of the proposed antennas.

After all the optimization has been done, a prototype of the proposed design was fabricated. There are some limitations on the fabrication processes that affect the performances of the prototype antennas. First limitation is the size of the transparent antenna that is very small. The precision of the tools used is low, which may results to some shifting in the overall geometries of the prototypes. The second limitation is the glass used for the fabrication. The tools used to measure the permittivity of the glass can

only provide the estimated permittivity. Thus, the permittivity of the glass integrated to the antenna is not accurate and the measured results were slightly different from the simulations. The fabricated antenna undergone the return loss and radiation pattern measurements. These tested results were compared to the simulation results and the results of the comparison will identify whether the antenna is successfully designed or not.

1.4 Thesis Outline

This thesis consists of 5 chapters which involve every step used to complete the proposed reconfigurable antenna. The thesis outline is organized as follows:

Chapter 2 is more toward the basic literature review on planar monopole antenna and some overviews about the development of the planar monopole antenna technology which is very popular in current research field. This includes the designs of UWB antennas and implementation of SRR/CSRR for band notch purposes. The metamaterial properties of the SRR/CSRR are one of the subchapters, where it explains their function in creating the band notch. Also, some basic information on the transparent thin film material is also included in another subchapter; explaining the concept of thin film and its implementation in other fields. These theoretical knowledge helped to proceed with next subchapter as this subchapter is mainly about the motivation of previous researches on the proposed transparent thin film antenna. In this chapter, all the previous researches related to UWB antennas, band-notched antennas, and transparent thin film antennas are discussed. This reading provided basic knowledge on the development of the proposed antenna structure.

In Chapter 3, the steps taken to complete the design were discussed. This-chapter focuses on the design stage using appropriate software. Then, the discussions were stretched out on the fabrication stage which involves software part, printing and hardware part. The final stage of this chapter includes the measurement stage. This final

stage can be used to determine either the fabricated antenna is working at proposed frequency band or not.

Chapter 4 highlighted the steps taken to design the proposed UWB transparent antenna. This chapter was separated into two sections. The first section focuses on the development of the UWB antenna using FR-4 board, followed by an introduction of SRR/CSRR to create a band notch. This first subchapter of the first section discussed on the development of the SRR/CSRR. The effect of each parameters in the SRR/CSRR was discussed throughout obtaining the 5.8 GHz band notch. The next subchapter discusses in details the proposed non-transparent UWB antenna with band notch at 5.8 GHz, including all the proposed geometries and performances.

The second section of Chapter 4 discusses on the development of the transparent thin film antenna using AgHT. The first subchapter in this section discusses the parameters involved in designing the UWB transparent antenna. The next subchapter is on the effects of introducing the metamaterial, SRR/CSRR on the transparent antenna. As the final step in completing proposed antenna design, some analyses on the effect of integration between the proposed UWB transparent antenna with the clear substrate (glass) were conducted. The geometry of the glass was varied to represent the various type of glass existed in the market. These discussions were on the return loss data, gain, efficiency and radiation pattern data for each part. Finally, conclusion and suggestions for future work were discussed in Chapter 5.

REFERENCES

- [1] Kin-Lu Wong. Compact and Broadband Microstrip Antennas, *1st ed. John Wiley & Sons Inc*, New York, 2002.
- [2] Singh, Rajender, "[Broadband Planar Monopole Antennas](#)," *M.Tech credit seminar report, Electronic Systems group, EE Dept, IIT Bombay*, pp. 1-24, Nov. 2003.
- [3] Balanis, C. A., Antenna Theory, Analysis and Design”, *John Wiley & Sons, ed. 3*, 2005
- [4] Zhang, G.-M., J.-S. Hong, and B. -Z. Wang, "Two novel band-notched UWB slot antennas FED by microstrip line", *Progress In Electromagnetics Research*, Vol. 78, 209-218, 2008.
- [5] Lim, K. S., M. Nagalingam and C. -P. Tan, "Design and construction of microstrip UWB antenna with time domain analysis, " *Progress In Electromagnetics Research M*, Vol. 3, 153-164, 2008.
- [6] Eldek, A. A. "Numerical analysis of a small ultra-wideband microstrip-FED tap monopole antenna, *Progress In Electromagnetics Research*, Vol. 65, 59-69, 2006.

- [7] H. -Y. Xu, H. Zhang, K. Lu, and X. -F. Zeng, "A holly-leaf-shaped monopole antenna with low RCS for UWB application," *Progress In Electromagnetics Research*, Vol. 117. 35-50, 2011.
- [8] Lin, S., R.-N. Cai, G.-L. Huang, and J.-X. Wang, "A miniature UWB semi-circle monopole printed antenna," *Progress In Electromagnetics Research Letters*, Vol. 23, 157-163, 2011.
- [9] Weigand, S.; Huff, G.H.; Pan, K.H.; Bernhard, J.T.; , "Analysis and Design of Broad-Band Single-Layer Rectangular U-Slot Microstrip Patch Antennas," *Antennas and Propagation, IEEE Transactions on* , vol.51, no.3, pp. 457-468, March 2003
- [10] Dau-Chyrh Chang; Ming-Chih Huang;,, "Multiple-Polarization Microstrip Reflectarray Antenna With High Efficiency And Low Cross-Polarization," *Antennas and Propagation, IEEE Transactions on* , vol.43, no.8, pp.829-834, Aug 1995.
- [11] Seki, T.; Honma, N.; Nishikawa, K.; Tsunekawa, K.; , "Millimeter-wave high-efficiency multilayer parasitic microstrip antenna array on teflon substrate," *Microwave Theory and Techniques, IEEE Transactions on* , vol.53, no.6, pp. 2101- 2106, June 2005
- [12] Faiz, M.M.; Wahid, P.F.;, "A High Efficiency L-Band Microstrip Antenna," *Antennas and Propagation Society International Symposium, 1999. IEEE* , vol.1, pp.272-275 vol.1, Aug 1999

- [13] Jackson, T., "Advances and challenges in active thin film electronics," *Semiconductor Device Research Symposium, 2009. ISDRS '09. International*, pp.1, 9-11 Dec. 2009
- [14] R. N. Simons, *Coplanar Waveguide Circuits, Components, and Systems*, John Wiley & Sons, New York, NY, USA, 2001.
- [15] Bluenion, Indoor Positioning and Tracking System, *Back & Rosta. Ltd*, Retrieved November 1st, 2013 from <http://www.bluenion.com/solutions.php?id=8>
- [16] Fontana, R. J., "Recent system applications of short-pulse ultra wideband (UWB) technology," *IEEE Trans. MTT*, vol. 52, No. 9, pp. 2087-2104, 2004.
- [17] M. Z. M. Nor (2012), *Dual Band Beam Reconfigurable Antenna For WLAN Application*, Master Thesis, Universiti Teknologi Malaysia, Skudai.
- [18] Oregon State University (2004, December 29), Major Advance Made In Transparent Electronics, *Phys. Org.* Retrieved October 28, 2013, from <http://phys.org/news2521.html>.
- [19] Gredmann (2004), *AgHT™ Product Line*, CPFilms. Inc, Retrieved October 28, 2013, from www.cpfilms.com
- [20] T. Peter, T. Yuk, R. Nilavalan, and S. Cheung, "A novel technique to improve gain in transparent UWB antennas," *Loughborough Antennas and Propagation Conference (LAPC)*, pp. 1–4, 2011.

- [21] Xian Ling Liang (2012). *Ultra-Wideband Antenna and Design*, Ultra Wideband - Current Status and Future Trends, Dr. Mohammad Matin (Ed.), ISBN: 978-953-51-0781-1, InTech.
- [22] Joseph J. Carr (2001), *The technician's Radio Receiver Handbook: Wireless and Telecommunication Technology*, Newnes: Butterworth-Heinemann
- [23] Sung-Jung Wu; Cheng-Hung Kang; Keng-Hsien Chen; Jenn-Hwan Tarng, "Study of an Ultrawideband Monopole Antenna With a Band-Notched Open-Looped Resonator," *Antennas and Propagation, IEEE Transactions on* , vol.58, no.6, pp.1890,1897, June 2010
- [24] Guang Yang; Qing-Xin Chu; Zhi-Hong Tu, "CPW-Fed UWB antenna with dual notch-band using embedded slot resonator," *Microwave and Millimeter Wave Technology (ICMMT), 2012 International Conference on* , vol.5, no., pp.1,4, 5-8 May 2012
- [25] Sung, Y., "Quad band-notched ultrawideband antenna with a modified H-shaped resonator," *Microwaves, Antennas & Propagation, IET* , vol.7, no.12, pp.999,1004, Sept. 17 2013
- [26] Binggang Xiao; Xiumin Wang; Jixiang Zhao, "A band notched ultra-wideband antenna using complementary split ring resonator," *Wireless Communications, Networking and Information Security (WCNIS), 2010 IEEE International Conference on* , vol., no., pp.110,112, 25-27 June 2010
- [27] Koley, S.; Choudhury, S., "An Integrated Planar Bluetooth and UWB Monopole Antenna with Dual Notched Bands Based on Etched Slot on the Patch and Split Ring Resonators on the Ground Plane," *Advanced Computing*

and Communication Technologies (ACCT), 2013 Third International Conference on , vol., no., pp.142,145, 6-7 April 2013

- [28] Sharma, M. M.; Kumar, A.; Yadav, S.; Ranga, Y.; Bhatnagar, D., "A compact ultra-wideband CPW-fed printed antenna with SRR for rejecting WLAN band," *Antenna Week (IAW), 2011 Indian* , vol., no., pp.1,3, 18-22 Dec. 2011
- [29] Lee, Yun-Shik (2008). Principles of Terahertz Science and Technology. Lecture Notes in Physics. New York: Springer-Verlag New York, LLC. pp. 1–3, 191. ISBN 978-0-387-09539-4.
- [30] R. Fallahi, A. A. Kalteh, and M. G. Roozbahani, "A novel UWB elliptical slot antenna with band-notched characteristics," *Progress In Electromagnetics Research*, Vol. 82, 127-136, 2008.
- [31] R. Azim and M. T. Islam, "Compact planar UWB antenna with band notch characteristics for WLAN and dsrc," *Progress In Electromagnetics Research*, Vol. 133, 391-406, 2013.
- [32] D.B. Lin, I. T. Tan, M.Y. Tsou, "A Compact UWB Antenna with CPW-fed", *Microwave and Optical Technology Letter*, Vol. 49, 372-375, 2007
- [33] M. Moktaari and J. Bornamen, "Directional ultra-wideband antennas in planar technologies," *Proceeding of the 38th European Microwave Conference*, October 2008.
- [34] Jianxin Liang; Lu Guo; Chiau, C.C.; Xiaodong Chen, "CPW-fed circular disc monopole antenna for UWB applications," *IWAT 2005. IEEE International Workshop on Antenna Technology: Small Antennas and Novel Metamaterials*, pp.505,508, 7-9 March 2005

- [35] Y. Y. Sun, S. W. Cheung, and T. I. Yuk, "Planar Monopoles with Different Radiator Shapes for UWB Body-Centric Wireless Communications," *Journal of Engineering*, vol. 2013, Article ID 683428, 13 pages, 2013.
- [36] Y.-L. Dong, C.-M. Sun, W.-Y. Fu & W. Shao, "Ultra-wideband bandpass filters with triple and quad frequency notched bands", *Journal of Electromagnetic Waves and Applications*, 2012
- [37] Kim, J.; Cho, C.S.; Lee, J.W., "5.2 GHz notched ultra-wideband antenna using slot-type SRR," *Electronics Letters* , vol.42, no.6, pp.315,316, 16 March 2006
- [38] M.-C. Tang, S. Xiao, T. Deng, D. Wang, J. Guan, B. Wang, and G.-D. Ge, "Compact UWB antenna with multiple band-notches for WiMAX and WLAN," *IEEE Transition Antenna Propagation*, vol. 59, no. 4, pp. 1372–1376, 2001.
- [39] X.-J. Liao, H.-C. Yang, N. Han & Y. Li, "A Semi-Circle-Shaped Aperture UWB Antenna With Triple Band-Notched Character", *Journal of Electromagnetic Waves and Applications*, 25:2-3, 257-266, 2011.
- [40] J. Y. Deng, Y. Z. Yin, X. S. Ren & Q. Z. Liu, "Study on a Dual-Band Notched Aperture UWB Antenna Using Resonant Strip and CSRR", *Journal of Electromagnetic Waves and Applications*, 23:5-6, 627-634, 2009.
- [41] T.-N. Chang and M.-C. Wu, "Band-notched design for UWB antennas," *IEEE Antennas Wireless Propagation Letters*, vol. 7, no., pp. 636–640, 2008.
- [42] X. Li, L. Yang, S.-X. Gong & Y.-J. Yang, "A Novel Tri-Band-Notched Monopole Antenna", *Journal of Electromagnetic Waves and Applications*, 23:1, 139-147, 2009.
- [43] H. Lai, Z.-Y. Lei, Y.-J. Xie, G.-L. Ning, and K. Yang, "UWB antenna with dual band rejection for WLAN/wimax bands using csrrs," *Progress In Electromagnetics Research Letters*, Vol. 26, 69-78, 2011.
- [44] D.-O. Kim, N.-I. Jo, H.-A. Jang, and C.-Y. Kim, "Design of the ultrawideband antenna with a quadruple-band rejection characteristics using a combination of the complementary split ring resonators," *Progress In Electromagnetics Research*, Vol. 112, 93-107, 2011.
- [45] O. El Mrabet, M. Aznabet, F. J. Falcone, H. Rmili, J.-M. Floc'h, M. Drissi, and M. Essaaidi, "A compact split ring resonator antenna for wireless

communication systems," *Progress In Electromagnetics Research Letters*, Vol. 36, 201-207, 2013.

- [46] P. A. Ambresh, P. M. Hadalgi, and P. V. Hunagund, "Effect of slots on microstrip patch antenna characteristics," *Computer, Communication and Electrical Technology (ICCCET), 2011 International Conference*, pp. 239–241, March 18–19, 2011.
- [47] Song, H. J., T. Y. Hsu, D. F. Sievenpiper, H. P. Hsu, J. Scharner, and E. Yasan, "A method for improving the efficiency of transparent film antennas," *IEEE Antennas and Wireless Propagation Letters*, Vol. 7, 753-756, 2008.
- [48] Katsounaros, A., Y. Hao, N. Collings, and W. A. Crossland, "Optically transparent antenna for ultra wide-band applications," *3rd European Conference on Antennas and Propagation*, 1918-1921, Berlin, Germany, 2009.
- [49] Katsounaros, A.; Hao, Y.; Collings, N.; Crossland, W.A., "Optically transparent ultra-wideband antenna," *Electronics Letters* , vol.45, no.14, pp.722,723, July 2 2009
- [50] Peter, T.; Sun, Y. Y.; Yuk, T.I.; AbuTarboush, H.F.; Nilavalan, R.; Cheung, S.W., "Miniature transparent UWB antenna with tunable notch for green wireless applications," *2011 International Workshop on Antenna Technology (iWAT)*, pp.259,262, 7-9 March 2011
- [51] Peter, T.; Nilavalan, R.; AbuTarboush, H.F.; Cheung, S.W., "A Novel Technique and Soldering Method to Improve Performance of Transparent Polymer Antennas," *Antennas and Wireless Propagation Letters, IEEE* , vol.9, no., pp.918,921, 2010
- [52] Hautcoeur, J., F. Colombel, X. Castel, M. Himdi, and E. Motta Cruz, "Optically transparent monopole antenna with high radiation efficiency manufactured with a silver grid layer (AgGL)," *Electronics Letters*, Vol. 45, 1014-1015, 2009.
- [53] S. Szmigielski, "Cancer Morbidity in Subjects Occupationally Exposed to High Frequency (Radiofrequency and Microwave) Electromagnetic Radiation," *The Science of the Total Environment* 180:9-17, 1996
- [54] P. K. Dixena (2012), *Study and design of directional Ultra wideband antenna in planar technology*, Unpublished note, ECE Department, Indian Institute of Science, Bangalore.

- [55] S. P. Gangwar, R. P. S. Gangwar, B. K. Kanaujia, Paras, "Resonant Frequency of Circular Microstrip Antenna using Artificial Neural Networks," *Indian Journal of Radio & Space Physics*, Vol. 37, pp. 204-208, June 2008.
- [56] G. Disken, F. Pala, E. Demir, H. D. Korucu, E. Ekmekci, " Electromagnetic Behavior of SRR Loaded Microstrip Transmission Lines: Investigation for Different SRR Types and Array Topologies, *PIERS Proceedings, Stockholm, Sweden*, August 2013
- [57] H. J. Song, " Challenges in Glass Integrated Optically Transparent Antennas," *International Symposium on Antennas and Propagation (ISAP)*, Jeju, Korea, 2011.
- [58] Levin, B.; Haridim, M., "Conical feed transparent antenna," *2012 IEEE 27th Convention of Electrical & Electronics Engineers* , pp.1,5, 14-17 Nov. 2012

Currently, thin film is one of the emerging technologies in the recent antenna technology and it has been rapidly adapted into the wireless communication system over these few years. It has attracted major attention to antenna designers due to its major advantage which is very low thickness. This thesis focuses on the design of the Ultra Wideband (UWB) antenna with a band notch at 5.8 GHz using the conventional FR-4 and the thin film as the main materials. The UWB antenna is capable of covering the 3.1-10.6 GHz frequencies, which includes the IEEE 802.11.a WLAN frequency of 5.8 GHz. A Split Ring In this paper, a different method for designing a new slot antenna with dual band-notched characteristic for ultra-wideband applications is presented. By using this modified structure in the ground plane, the antenna provides a wide usable fractional bandwidth of more than 130 % (3.01–15.35 GHz). To generate a single band-notched function, we convert a square radiating patch to a square-ring with an inverted T-shaped strip. The measured results reveal that the presented dual band-notched slot antenna offers a very wide bandwidth with two notched bands, covering all the 5–6 GHz wireless local area network, 8–8.5 GHz international telecommunication union bands. Keywords. Dual band-stop performance Protruded strips Slot antenna UWB applications.